

E71/E72/E73



Typically used in auxiliary and accessory circuits in truck, bus', RVs and marine systems . Others include battery chargers and DC audio systems. engine compartment and bilge area applications. Automatic reset, Modified reset and Manual reset is available.


Description:

- Single pole thermal type breakers.
- Rating:5-30A , 14 Vdc(E87&E88) ; 28Vdc(E89).
- Interrupt Rating: 150A -450A@ 14 Vdc.
- Operating Temperature Rating: -40 °C to 85 °C.
- Storage Temperature Rating: -40 °C to 125 °C.
- Materials: UL-Rated 94V0 thermoplastic body.Tin-plated copper alloy terminals.
- Marking: Standard marking includes amp/volt ratings, part number and date code.Cover is color-coded to amerage ratings.
- Termination: Compatible with ATC fuse blocks .
- Compliances: SAEJ553

Electrical Characteristics:

- Over-load Percentage 100% : No trip with 60 minutes.
- Over-load Percentage 160% : Trip within 20 minutes.
- Over-load Percentage 200% : Trip within 60 sec.

Dimensions: mm

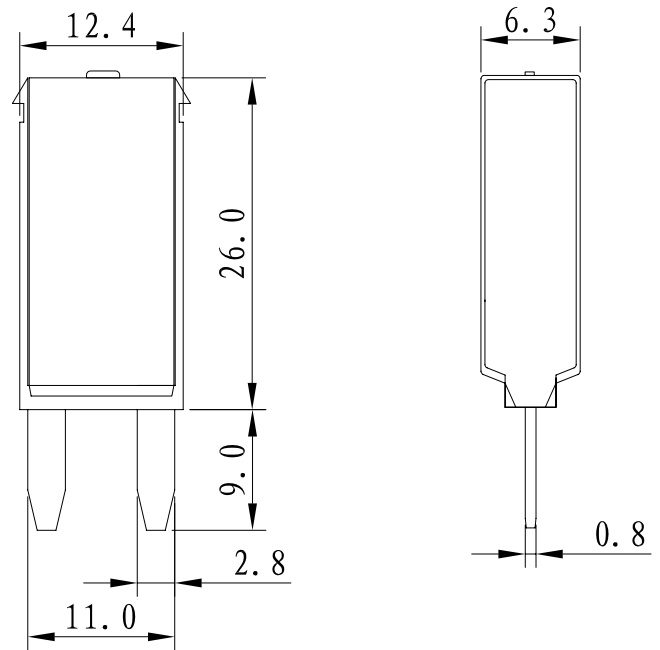

Part Numbering System:

E7	□ □ A	00	
		00 - Standard ,Marking (Consult factory for special markings)	
05 - 5 amps [LT. Brown(tan)] 06 - 6 amps [Moss Green] 75 - 7.5 amps [Brown] 10 - 10 amps [Red] 15 - 15 amps [Blue] 20 - 20 amps [Yellow] 25 - 25 amps [White] 30 - 30 amps [Green]			
E71 Automatic Reset Type I E72 Modified Reset Type II E73 Manual Reset Type III			

Standard Marking:

